

Exam : 1D0-441

Title : CIW DATABASE SPECIALIST

Version : DEMO

1.A foreign key maps to a:

- A.prime key.
- B.indirect key.
- C.parent key.

D.composite key.

Correct:C

2.Consider the relation shown in the exhibit. Which of the following SQL statements would properly add information for a new employee?

Emp_ID	First_Name	Last_Name	Birth_Date
0001	Helen	Lee	12-05-75
0002	James	Smith	10-25-76
0003	Eliza	Perez	02-15-80
0004	Samuel	Hayes	11-07-71

A.INSERT INTO Employee VALUES(0005, Tim, Bogart, 03-15-77);

B.INSERT INTO Employee(Emp_ID, First_Name, Last_Name, Birth_Date) VALUES(0004, Tim, Bogart, 03-15-77);

C.INSERT INTO Employee(Emp_ID, First_Name, Last_Name, Birth_Date) VALUES(0005, Tim, Bogart, 03-05-77);

D.INSERT INTO Employee (Emp_ID, First_Name, Last_Name, Birth_Date) VALUES (0005, Tim, Bogart, 03-05-77);

Correct:D

3. Which pair of relational algebraic operations requires union compatibility?

A.Union and join

B.Selection and projection

C.Intersection and difference

D.Cartesian product and intersection

Correct:C

4. Which static member of the ResultSet class should be used to create an updatable result set?

A.ResultSet.TYPE_FORWARD_ONLY

B.ResultSet.TYPE_FORWARD_UPDATABLE

C.ResultSet.TYPE_SCROLL_INSENSITIVE

D.ResultSet.TYPE_SCROLL_SENSITIVE

Correct:D

5. Which method of the Statement interface could be used to delete data from a database?

- A.executeUpdate
- B.executeQuery
- C.close

D.clearBatch

Correct:A

6.Which JDBC interface is used to extract information about the database schema?

A.ResultSet

B.Connection

C.DatabaseMetaData

D.ResultSetMetaData

Correct:C

7. Which of the following statements is true of the Connection interface?

A.Each JDBC client application must provide a class that implements the Connection interface.


B.Each JDBC driver provides a class that implements the Connection interface.

C.Each JVM provides a class that implements the Connection interface.

D.The Connection interface can be used to load a JDBC driver.

Correct:B

8.Consider the Entity-Relation diagram shown in the exhibit. When the logical database design phase is completed, which of the following is a valid DBDL description of the base relations for the Entity-Relation diagram?

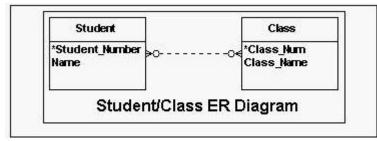

A.STUDENT(Student_Number: integer NOT NULL Name: variable length character string length 20 NOT NULL) Primary Key Student_Number CLASS(Class_Num: integer NOT NULL Class_Name: integer NOT NULL) Primary Key Class_Num

B.STUDENT(Student_Number: integer NOT NULL Name: variable length character string length 20 NOT NULL) Primary Key Student_Number CLASS(Class_Num: integer NOT NULL Class_Name: integer NOT NULL) Primary Key Class_Num Foreign Key Class_Num References STUDENT

C.STUDENT(Student_Number: integer NOT NULL Name: variable length character string length 20 NOT NULL) Primary Key Student_Number STU_CLASS(Student_Number: integer NOT NULL Class_Num: integer NOT NULL) Primary Key Student_Number CLASS(Class_Num: integer NOT NULL Class_Name: integer NOT NULL) Primary Key Class_Num

D.STUDENT(Student_Number: integer NOT NULL Name: variable length character string length 20 NOT NULL) Primary Key Student_Number STU_CLASS(Student_Number: integer NOT NULL Class_Num: integer NOT NULL) Primary Key Student_Number, Class_Num CLASS(Class_Num: integer NOT NULL) Class_Name: integer NOT NULL) Primary Key Class_Num

Correct:D

9.What is the highest normal form of the relation(s) shown in the exhibit?

Teacher_ID	Teacher_Name	Dept_Code	Office_No	Teacher_Aide	Dept_Phone
A12	M. Smith	Acc	A234	T. Juarez	555-1375
E32	L. Rodriguez	Eco	E781	L. James	555-7402
M34	Y. Yee	Math	M442	J. Daye	555-2345
S29	H. Huan	Sci	\$301	R. Nguyen	555-8945
A15	M. Chang	Acc	A257	T. Juarez	555-1375
E42	T. Colton	Eco	E331	L. James	555-7402
M74	R. Perez	Math	M662	J. Daye	555-2345

A.Boyce-Codd normal form

B.First normal form

C.Second normal form

D.Third normal form

Correct:C

10.Consider the following domain description: domain Student_ID: integer domain Grade: fixed length character string length 1 To meet business needs, you must add enterprise constraints to this domain description. The Student_ID should always be a positive integer. The initial value of Student_ID should be 0 (zero) to indicate that a valid ID number has not been assigned. The Grade should be limited to the letters A through F. Which SQL statements would perform these tasks?

A.CREATE DOMAIN Student_ID AS INTEGER DEFAULT 0 CHECK (Student_ID > -1); CREATE DOMAIN Grade AS CHAR(1); CHECK (Student_ID IN ('A','B','C','D','E','F'));

B.CREATE DOMAIN Student_ID AS INTEGER CHECK (Student_ID > -1); CREATE DOMAIN Grade AS CHAR(1); DEFAULT NULL CHECK (Student_ID IN ('A','B','C','D','E','F'));

C.CREATE DOMAIN Student_ID AS INTEGER; CREATE DOMAIN Grade AS CHAR(1); CONSTRAINT ENTERPRISE CHECK;

D.CREATE TABLE ENTERPRISE (Student_ID INTEGER NULL Grade VARCHAR(1) NOT NULL, CONSTRAINT ENTERPRISE CHECK;

Correct:A

11.Assuming that conn references a valid and open connection to the database, which code segment will insert values into the Employees relation?

A.conn.executeUpdate (INSERT INTO Employees VALUES + (1001, 'Karen Hughes', 55000));

B.Statement s = conn.createStatement(); s.execute(INSERT INTO Employees VALUES + (1001, 'Karen Hughes', 55000));

C.Statement s = conn.createStatement(); s.executeQuery(INSERT INTO Employees VALUES + (1001, 'Karen Hughes', 55000));

D.Statement s = new Statement(); s.executeUpdate(INSERT INTO Employees VALUES + (1001, 'Karen Hughes', 55000));

Correct:B

12.Which term describes one or more database operations that are executed as a single unit? A.Update

B.Transaction

C.Encapsulation

D.Operational group

Correct:B

13. What is the highest normal form of the relation(s) shown in the exhibit?

Emp_ID	Emp_Name	Dept_ID	Dept_Name	Mngr_ID	Mngr_Name	P_No	P_Name	Start_Date
001	Lee	25	R & D	12	Ames	1,4	Adams, Jones	
002	Smith	35	Marketing	22	Yee	2,5	Ingram, PSoft	2-1-02 2-2-02, 3-2-02
003	Perez	25	R & D	12	Ames	3	IMacks	5-5-02

A.Second normal form

B.Third normal form

C.No normal form

D.First normal form

Correct:C

14.Consider the following SQL statement: SELECT * FROM Orders WHERE Order_Date LIKE %02 ORDER BY Sales_Rep_No, Amount DESC; Using the Orders Relation shown in the exhibit, which of the following tables shows the result of this SQL statement?

exhibit 1.13	4			_0×	
Order_No	Order_Date	Customer_No	Sales_Rep_No	Amount	
2001	11-04-01	1001	108	24.89	
2004	12-14-01	1004	210	126.99	
2006	01-14-02	1008	187	1216.69	
2009	01-15-02	1008	350	926.89	
2012	02-02-02	1000	108	816.09	
2012	02-02-02	1004	210	1818.19	
2016	02-15-02	1006	109	678.99	
2019	02-22-02	1003	350	1936.69	
2024	02-22-02	1004	210	1226.09	
2025	03-01-02	1009	108	538.89	
2028	03-04-02	1006	109	1648.49	
0		Orders Relation	DN	23	
Option A				<u>_ ×</u>	
Order_No	Order_Date	e Customer_No	Sales_Rep_N	o Amount	
2009	01/15/02	1008	350	926.89	
2019	02-22-02	1003	350	1936.69	
2024	02-22-02	1004	210	1226.09	
2015	02-10-02	1004	210	1818.19	
2006	01/14/02	1008	187	1216.69	
2016 2028	02-16-02	1006	109	678.18 1648.49	
2028	03-04-02	1008	109	538.89	
2023	02/02/02	1003	108	816.09	
🗱 Option B					
Order No	Order Date	- Customer No	Sales Rep N		
2012	0 Order_Dati 02/02/02	e Customer_No 1001	108	lo Amount 816.09	
2012	03-01-02	1009	108	538.89	
2028	03-04-02	1006	109	1648.49	
2016	02-16-02	1006	109	678.18	
2006	01/14/02	1008	187	1216.69	
2015	02-10-02	1004	210	1818.19	
2024	02-22-02	1004	210	1226.09	
2019	02-22-02	1003	350	1936.69	
2009	01/15/02	1008	350	926.89	
Coption C				<u>_ ×</u>	
Order_No					
2019	02-22-02	1003	350	1936.69	
2009	01/15/02	1008	350	926.89	
2015	02-10-02	1004	210	1818.19	
2024	02-22-02	1004	210	1226.09	
2006	01/14/02	1008	187 109	1216.69 1648.49	
2028	03-04-02	1006	109	678.18	
2018	02/02/02	1008	109	816.09	

 Option D	2					
Order_No	Order	Date	Custome	r_No	Sales	Rep_No

- 🗆 ×

Amount

			-

A.Exhibit Option A B.Exhibit Option B C.Exhibit Option C D.Exhibit Option D

Correct:B

15.Consider the following stored procedure: CREATE PROCEDURE showFees AS SELECT Fee FROM ACTIVITY WHERE Fee > 0 Which Java code segment will correctly utilize this stored procedure?

A.CallableStatement cs = conn.prepareCall({call showFees}); ResultSet rs = cs.executeQuery();

B.CallableStatement cs = conn.prepareCall({call showFees}); ResultSet rs = cs.execute();

C.PreparedStatement ps = conn.prepareStatement(SELECT Fee + FROM ACTIVITY + WHERE Fee > 0); ResultSet rs = cs.execute();

D.PreparedStatement ps = conn.prepareStatement(SELECT Fee + FROM ACTIVITY + WHERE Fee > 0); ResultSet rs = cs.execute();

Correct:A

16. Which Statement interface methods are used to execute a SQL select query?

- A.executeUpdate and close
- B.executeUpdate and execute
- C.executeQuery and execute
- D.executeUpdate and executeQuery

Correct:C

17. What is the purpose of the batch update feature in JDBC 2.0?

- A.To reduce processing time
- B.To enable transaction processing
- C.To provide enhanced security
- D.To generate result sets


Correct:A

18. With regard to databases, what is normalization?

- A.The process of reducing the cardinality of a relation
- B.The process of organizing and refining relations
- C.The process of duplicating data to reduce the number of tables
- D.The process of limiting data stored in a table to a specific range of values

Correct:B

19.Consider the Information Engineering diagram in the exhibit showing the relations BUILDING and RESIDENT. What is the relationship between BUILDING and RESIDENT?

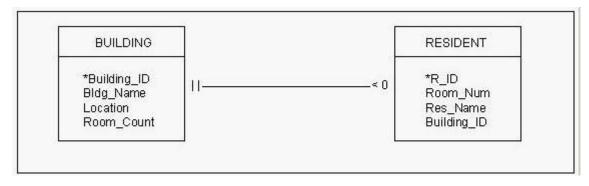

A.1:1 B.1:N C.N:1 D.M:N

Correct:B

20.Consider the relations shown in the exhibit. Due to restructuring, the Sales department has been eliminated and the employees working in that department have been dismissed. All ID information is stored as integers. Which SQL statement would be used to return a relation with all information for the employees who have been dismissed?

ID	Last_Name	First_Name	Birth_Date	Dept_II
0001	¥argas	Jose	09-15-70	032
0002	Jones	Elisa	12-12-55	042
0003	Chu	Helen	04-14-75	032
0004	Day	Danny	06-12-65	022

Dept_ID	Dept_Name	Dept_Mngr	Dept_Ext
022	Sales	Reyes, Nancy	5432
032	Accounting	Yee, Cindy	1223
042	Finance	Ames, Joe	4675

Employee Relation

A.SELECT * FROM Employee;

B.SELECT ID, Last_Name FROM Employee; WHERE ID = 0004;

C.SELECT * FROM Employee; WHERE Dept_ID = 022;

D.SELECT * FROM Employee WHERE Dept_ID = 022;

Correct:C